TFV 29 FS

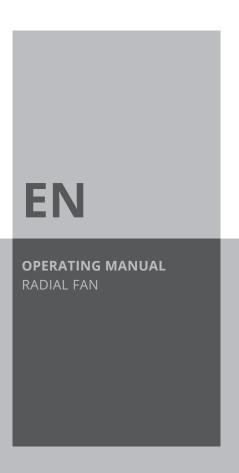








Table of contents

Notes regarding the operating manual	1
Safety	1
Information about the device	3
Transport and storage	4
Assembly and start-up	4
Operation	5
Available accessories	5
Errors and faults	5
Maintenance	6
Technical annex	6
Disposal	6

Notes regarding the operating manual

Symbols



Warning of electrical voltage

This symbol indicates dangers to the life and health of persons due to electrical voltage.



Warning

This signal word indicates a hazard with an average risk level which, if not avoided, can result in serious injury or death.



Caution

This signal word indicates a hazard with a low risk level which, if not avoided, can result in minor or moderate injury.

Note

This signal word indicates important information (e.g. material damage), but does not indicate hazards.



Info

Information marked with this symbol helps you to carry out your tasks quickly and safely.



Follow the manual

Information marked with this symbol indicates that the operating manual must be observed.



Wear hearing protection

Information marked with this symbol indicates that you should wear hearing protection.

You can download the current version of the operating manual and the EU declaration of conformity via the following link:



TFV 29 FS



https://hub.trotec.com/?id=41880

Safety

Read this manual carefully before starting or using the device. Always store the manual in the immediate vicinity of the device or its site of use!



Warning

Read all safety warnings and all instructions.

Failure to follow the warnings and instructions may result in electric shock, fire and / or serious injury. Save all warnings and instructions for future reference.

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

- Do not use the device in potentially explosive rooms.
- Do not use the device in aggressive atmosphere.
- Set the device up in an upright and stable position.
- Let the device dry out after a wet clean. Do not operate it when wet.
- Do not use the device with wet or damp hands.
- Do not expose the device to directly squirting water.
- Never insert any objects or limbs into the device.
- Do not cover or transport the device during operation.
- Do not sit on the device.
- This appliance is not a toy! Keep away from children and animals. Do not leave the device unattended during operation.
- Check accessories and connection parts for possible damage prior to every use of the device. Do not use any defective devices or device parts.



- Ensure that all electric cables outside of the device are protected from damage (e.g. caused by animals). Never use the device if electric cables or the power connection are damaged!
- The electrical connection must correspond to the specifications in chapter Technical data.
- Insert the mains plug into a properly secured mains socket
- Observe the technical data when selecting extensions to the power cable. Completely unroll the extension cable.
 Avoid electrical overload.
- Before carrying out maintenance, care or repair work on the device, remove the mains plug from the mains socket.
 Hold onto the mains plug while doing so.
- Switch the device off and disconnect the power cable from the mains socket when the device is not in use.
- Do not under any circumstances use the device if you detect damages on the mains plug or power cable.
 If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
 - Defective power cables pose a serious health risk.
- Observe the storage and operating conditions as given in the Technical data chapter.
- Ensure that the air inlet and outlet are not obstructed.
- Make sure that there are no loose items located in the immediate surroundings of air inlet and air outlet.

Intended use

The device TFV 29 FS may be used for generating a broad nearground air current with a high air circulation for the accelerated drying of flooring or to assist in drying walls, floors and stairwells after water damage or else for construction drying. All other applications are considered improper use.

Improper use

The radial fan is not suited for installation in fluids or on flooded or boggy grounds. Any unauthorised changes, modifications or alterations to the device are forbidden.

Personal protective equipment



Wear hearing protection

Wear appropriate hearing protection when working with the device.

Personnel qualifications

People who use this device must:

 have read and understood the operating manual, especially the Safety chapter.

Residual risks



Warning of electrical voltage

Work on the electrical components must only be carried out by an authorised specialist company!



Warning of electrical voltage

Before any work on the device, remove the mains plug from the mains socket!

Hold onto the mains plug while pulling the power cable out of the mains socket.



Warning

Dangers can occur at the device when it is used by untrained people in an unprofessional or improper way! Observe the personnel qualifications!



Warning

The device is not a toy and does not belong in the hands of children.



Warning

Risk of suffocation!

Do not leave the packaging lying around. Children may use it as a dangerous toy.



Caution

Risk of injury due to parts being whirled up by the strong air current.

Before switching the device on, make sure that there are no loose parts (clothing, hair ...) located near the air inlet or outlet!

Note

Do not use abrasive cleaners or solvents to clean the device.

Behaviour in the event of an emergency

- 1. In an emergency, disconnect the device from the mains feed-in: Switch the device off and disconnect it from the mains.
- 2. Remove persons from the danger area.
- 3. Do not reconnect a defective device to the mains.



Information about the device

Device description

The device TFV 29 FS was designed for a very high air flow rate. It may be used for drying carpets, buildings or screed as well as for the ventilation of poorly accessible intermediate spaces.


Owing to the high air circulation, the device can also be used to control excessive humidity levels. The fan is also very effective for the additional air circulation when heating large buildings, e.g. in the months of winter.

The device can be set up in four drying positions for different surface drying applications. The stand bar integrated at the bottom can be folded out for tilting the device, thus permitting the ventilation and drying of walls or entire stairwells. If the device is positioned directly on the ground, the entire discharged air is distributed at high speed in a broad, nearground air current, making this position ideal for accelerated surface drying. In upright position, the device can be used for well-directed ventilation and drying of the ceiling. When positioned on the edge with the air outlet pointing to the side, the device can be used for ventilation and drying of confined spaces or extensive wall surfaces.

The device is further equipped with a service socket, which means that you can operate additional devices via the same socket. This socket is ready for operation for as long as the device is connected to the mains – it does not need to be switched on.

The devices can be stacked on top of one another for spacesaving storage. Do not exceed the maximum of five stacked devices. Additionally, the device is fitted with integrated cable holders allowing you to wind up the connection cable.

Device depiction

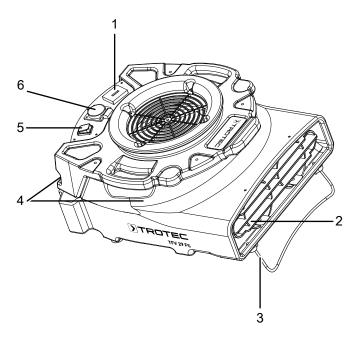



No.	Designation
1	Operating hours counter
2	Air outlet
3	Fold-out stand bar
4	Cable holder
5	On/off switch
6	Service socket
7	Air inlet
8	Transport handles



Transport and storage

Note

If you store or transport the device improperly, the device may be damaged.

Note the information regarding transport and storage of the device.

Transport

Before transporting the device, proceed as follows:

- Switch off the device.
- Hold onto the mains plug while pulling the power cable out of the mains socket.
- Do not use the power cable to drag the device.

After transporting the device, observe the following:


· Set up the device in an upright position after transport.

Storage

Before storing the device, observe the following:

When the device is not being used, observe the following storage conditions:

- dry and protected from frost and heat
- in an upright position where it is protected from dust and direct sunlight
- with a cover to protect it from invasive dust if necessary
- stackable: up to 5 devices may be stacked on top of one another

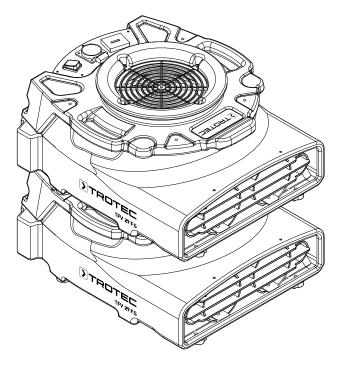

Info

Do not take the devices into operation when stacked. Stacking rules out an efficient usage of the devices.

Assembly and start-up

Scope of delivery

- 1 x Device
- 1 x Manual


Unpacking the device

- 1. Open the cardboard box and take the device out.
- 2. Completely remove the packaging.
- Fully unwind the power cable. Make sure that the power cable is not damaged and that you do not damage it during unwinding.

Start-up

Positioning

- Set the device up separately and in a stable position.
- The device can be variably positioned in a way to allow an air discharge at an angle of 0° (horizontal), 20°, 90° (vertical), or 0° with the air outlet placed in the upright position.

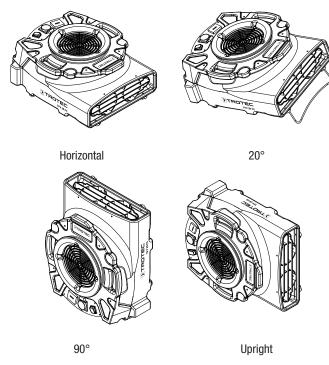


Connecting the power cable

 Insert the mains plug into a properly secured mains socket.



Operation

Operating elements

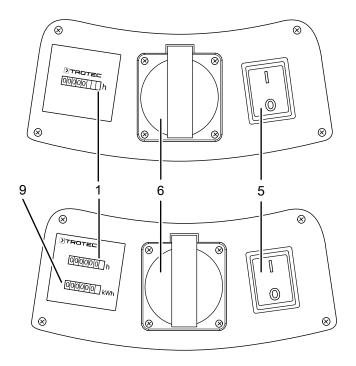

No.	Designation	
1	Operating hours counter	
5	On/off switch	
6	Service socket	
9	Dual counter (operating hours counter and MID-certified kilowatt hours counter) – (optional)	

Switching the device on

Once you have completely installed the device as described in the Start-up chapter, you can switch it on.

1. Set the on/off switch (5) to \mathbf{I} .

Stage 1 = I

⇒ The device is switched on.

Dual counter (optional)

The device is optionally available with a control panel fitted with a dual counter (9). The dual counter registers both the operating hours and energy consumption, and is MID-compliant.

Using the service socket

The device TFV 29 FS is equipped with a service socket, which means that you can operate another device via the same socket. The service socket is ready for operation as soon as the devices are connected to the mains – they do not need to be switched on.

Shutdown



Warning of electrical voltage

Do not touch the mains plug with wet or damp hands.

- Set the on/off switch (5) to 0.
- Hold onto the mains plug while pulling the power cable out of the mains socket.
- Clean the device according to the Maintenance chapter.
- Store the device according to the Storage chapter.

Available accessories

Available accessories	Article number
Dual counter, MID-compliant	7.140.000.903

Errors and faults

The device has been checked for proper functioning several times during production. If malfunctions occur nonetheless, check the device according to the following list.

The device does not start:

- Check the power connection.
- Check the power cable and mains plug for damages.
- Check the on-site fusing.
- Wait for 10 minutes before restarting the device. If the device is not starting, have the electrics checked by a specialist company or by Trotec.

The fan operates only for a brief period, then switches off:

- Check whether the protective grid at the air inlet is obstructed in some way. If applicable, remove foreign objects.
- The motor bearing might be damaged. Please contact the customer service.

The fan is not running:

- Check whether the device is switched on.
- Check the power connection.
- Check the power cable and mains plug for damages.
- Check the on-site fusing.

Note

Wait for at least 3 minutes after maintenance and repair work. Only then switch the device back on.

Your device still does not operate correctly after these checks?

Please contact the customer service. If necessary, bring the device to an authorized specialist electrical company or to Trotec for repair.



Maintenance

Activities required before starting maintenance



Warning of electrical voltage

Do not touch the mains plug with wet or damp hands.

- Switch the device off.
- Hold onto the mains plug while pulling the power cable out of the mains socket.

Cleaning the housing

Clean the housing with a soft, damp and lint-free cloth. Ensure that no moisture enters the housing. Protect electrical components from moisture. Do not use any aggressive cleaning agents such as cleaning sprays, solvents, alcohol-based or abrasive cleaners to dampen the cloth.

Cleaning the fan and device interior

- Check fan and protective grid for perfect condition before and after each application.
- Clean the fan after each operation.
- Use compressed air to remove particles, lint, dust and dirt from motor, fan wheel and protective grid. Do not in any event use a high-pressure cleaner to clean the fan.
- Other than that, the device does not require maintenance.

Technical annex

Technical data

Parameter	Value
Model	TFV 29 FS
Air flow rate	1,150 m ³ /h
Mains connection	1/N/PE ~ 230 V / 50 Hz / 0.74 A
Power consumption	0.17 kW
Stat. air pressure (freely blowing)	max. 290 Pa
Protection type	IP44
Sound level (distance 3 m)	64 dB(A)
Dimensions (L x W x H)	520 x 450 x 255 (mm)
Weight	11 kg

Disposal



The icon with the crossed-out waste bin on waste electrical or electronic equipment stipulates that this equipment must not be disposed of with the household waste at the end of its life. You will find collection points for free return of waste electrical and electronic equipment in your vicinity. The addresses can be obtained from your municipality or local administration. For further return options provided by us please refer to our website www.trotec24.com.

The separate collection of waste electrical and electronic equipment aims to enable the re-use, recycling and other forms of recovery of waste equipment as well as to prevent negative effects for the environment and human health caused by the disposal of hazardous substances potentially contained in the equipment.

Trotec GmbH & Co. KG

D-52525 Heinsberg 1+49 2452 962-400

<u>+49 2452 962-200</u>

info@trotec.com www.trotec.com